



# ESC 1350 Static Compactor

The ESC 1350 Static Compactor is designed to handle medium to high volumes of industrial and commercial waste quickly and efficiently. Specified to suit your needs, loading can be by hand, bin lift, forklift, chute or special application.

With its heavy duty construction, large feed aperture, fast cycle time and the highest compaction force in its class, it will outperform and outlast all others.



Standard features include a wear resistant steel floor, integral hydraulic power pack with three built in levels of protection, key switch operation, emergency stop, cycle selector, auto pin off switch, auto shut off, and ¼ full and full warning lights.


All machines are manufactured and tested to the highest standards and are fully CE approved and rated to IP65 for use outside. They are supplied with both a 1-year comprehensive warranty and servicing agreement and 5-year structural warranty.



## Technical Specification

|                                     |                     |
|-------------------------------------|---------------------|
| Motor rating                        | 7.5 kW              |
| Charge box volume                   | 1.85m <sup>3</sup>  |
| Volume per stroke                   | 1.44m <sup>3</sup>  |
| Volume per hour                     | 1.48m <sup>3</sup>  |
| Cycle time                          | 35 secs             |
| Compaction force                    | 35 tonne            |
| Operating Pressure                  | 2300psi             |
| Clear aperture length               | 1400mm              |
| Clear aperture width                | 1475mm              |
| Charge box depth                    | 900mm               |
| Loading height                      | 800mm               |
| Aperture height                     | 920mm               |
| Ram depth                           | 700mm               |
| Penetration into container          | 355mm               |
| Overall length (to container face)  | 3450mm              |
| Overall width                       | 1700mm              |
| Height to top of charge box         | 1320mm              |
| Dock height                         | 1320mm              |
| Power supply (415v,3 phase + e + n) | 32A M50 (or type D) |
| Oil reservoir capacity              | 120 litres          |
| Total weight                        | 2,950 kg            |

Machines are supplied with up to 7m of core, 4mm braided, flexible control cable complete with 5-pin socket.

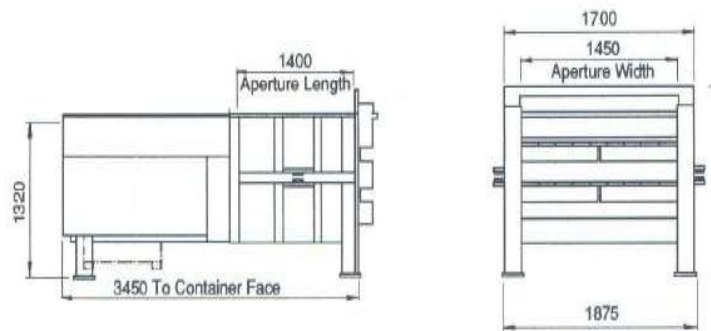

The contents of this leaflet are subject to variation and modification without notice.