

ENB50/4S Vertical Baler

The proven and economical hydraulic compact baler. All of the equipment including the cylinder and baling straps, are integrated in the compact housing.

Advantages: Feeding from the top makes this a space-saving solution. Being visually attractive makes this baler suitable for areas frequented by the public.

The small floor space required of approx. 0,7m² allows the ENB50 4S to be placed in relatively narrow recesses.

- Easy operation – high safety standard
- Rapid compacting cycle, automatic ram return, low noise level
- Hold-down claws prevent stubborn material from springing back
- Visual indicator to show when full bale size is reached
- Simple, low effort bale binding – low bale weight
- Slight V shaped press chamber aids in bale removal
- Sturdy, compact, low-maintenance design



Easy accessible tying tapes

Special Equipment


- Adaptor to compact cans
- Mobile on castors

Technical Specifications

Motor	kW	1,5
Voltage	V/Hz	230/50 400/50
Compaction Force Max	t	4
Cycle Time	s	14
Compaction Time	s	9
Opening W x H	cm	60 x 50
Opening height from door	cm	118
Bale Size W x H x D approx.	cm	60 x 55 x 60
Bale Weight** max.	kg	30-50
Overall Width	cm	77
Overall Depth	cm	94
Overall Height	cm	143
Gross Weight	kg	350



Adaptor to compact cans (Special equipment)

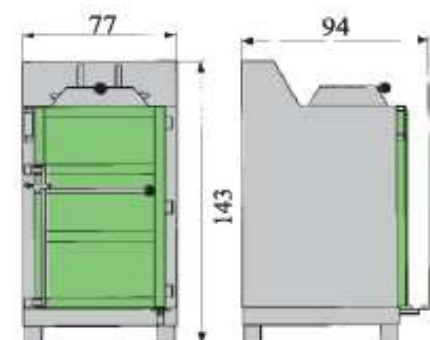

*depending upon type of material

Technical details and colour subject to change without notice

